Mega StarLEDs BA15d (20x46mm) 6xSMD LED AC/DC mit Brückengleichrichter für Signalsäulen

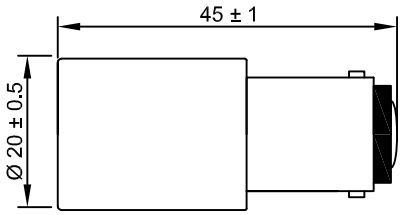

Lampensockel nach DIN EN 60061-1: BA15d / Lamp base in accordance to DIN EN 60061-1: BA15d
All dimensions are in millimeters / Tolerance is +/- 0,5 unless otherwise noted

Elektrische und optische Daten sind bei einer Umgebungstemperatur von 25°C gemessen.
Electrical and optical data are measured at an ambient temperature of 25°C.

Bestell-Nr. Part No.	Farbe Colour	Spannung Voltage	typ. Strom typ. Current	typ. Lichtstärke typ. Lumi. Intensity	Dom. Wellenlänge Dom. Wavelength
HCB6136230D-RT	Red	230V AC/DC	3mA	6 x 240mcd	625nm
HCB6136230D-GN	Green	230V AC/DC	3mA	6 x 210mcd	525nm
HCB6136230D-GE	Yellow	230V AC/DC	3mA	6 x 75mcd	590nm
HCB6136230D-BL	Blue	230V AC/DC	3mA	6 x 42mcd	465nm
HCB6136230D-W	White	230V AC/DC	3mA	6 x 290mcd	6000K

Lichtstärkedaten der verwendeten Leuchtdioden bei DC / Luminous intensity data of the used LEDs at DC

Lagertemperatur / Storage temperature	-25°C - +80°C
Umgebungstemperatur / Ambient temperature	-20°C - +60°C
Spannungstoleranz / Voltage tolerance	+10%

Allgemeiner Hinweis: Bedingt durch die Fertigungstoleranzen der Leuchtdioden kann es zu geringfügigen Schwankungen der Farbe (Farbtemperatur) kommen.
Es kann deshalb nicht ausgeschlossen werden, daß die Farben der Leuchtdioden eines Fertigungsloses unterschiedlich wahrgenommen werden.

General: Due to production tolerances, colour temperature variations may be detected within individual consignments.

Subject to change without prior notice

H-C-B Technik
nfo@hcb-technik.de
www.hcb-technik.de

SMD LED Lamps for Light Towers (3x2 LEDs)
T6 ⅓ (20x45mm) BA15d with bridge rectifier

a	Changed currents	27.01.14	D.L.	Drawn: **D.L.**	Ch´d: **H.K.**	Date: **09.07.13**
	Revision:	Date:	Name:	Scale: **1 : 1**	**Datasheet: HCB6136230D-XX**	